


MATERIALS & FINISHES

The most practical way to rejuvenate old markerboards and chalkboards – use LCS Skins (Face Sheets) over existing badly-worn boards. LCS Skins are also available with double-sided tape for easy installation. Framed EZ Fit panels provide yet another option for resurfacing old boards.

Face Sheets & Panels_54-55
 Adhesives and Accessories_55
 Tan Nucork & Hook Fab_56
 Claridge Cork_57
 Designer Series Fabrics_58
 Fabricork_59
 Wood & Aluminum_60

Markerboards: Color Options

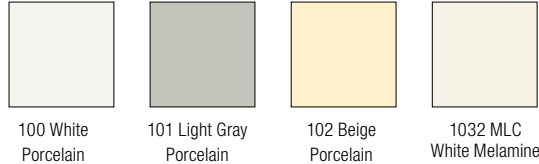


Colors are reproduced with reasonable accuracy. If match is critical, call or write for samples

NP3 Chalkboards: Color Options



LCS Markerboard Skins



Features:

- LCS porcelain enamel steel skins can be applied on the face of slate, composition chalkboard, or slated plaster walls to convert old defective boards into permanent new boards of superior quality
- LCS provides a colorfast and highly scratch and stain resistant markerboard surface that writes and erases easily and is easy to maintain
- Face sheets are shipped precut to customer's specifications

Note: For floor-to-ceiling installations requiring matched butt joints, contact Claridge. Available in 5'0" heights. Call for pricing. For cutting to non-standard sizes – vertical and/or horizontal – add \$.80 per lin. ft. A \$50 packing charge will be added to orders for less than 200 sq. ft.

Number	Std. Height	Std. Length
LCS	4'0"	4', 6', 8', 10', 12

For chalkboard skins specify color and use price shown.

LCS Skins with Double-Sided Tape



Features:

- LCS porcelain enamel steel skins backed with double-sided tape make resurfacing existing boards a breeze
- Measure to verify fit, clean old board surface, position new skin, peel, and stick – it's that easy
- EZ Stick Skins installations use no solvents, eliminate drying time, and are always a consistent thickness
- Face sheets are shipped precut to customer's specifications

For cutting to non-standard sizes – vertical and/or horizontal – add \$.80 per lin. ft. A \$50 packing charge will be added to orders for less than 200 sq. ft.

Number	Std. Height	Std. Length
EZ Stick Skins	4'0"	4', 6', 8', 10', 12'

LCS Markerboard Panel

LCS is available in 5'0" heights. Call for pricing and availability. For cutting to non-standard sizes – vertical and/or horizontal – add \$.80 per lin. ft. A \$50 packing charge will be added to orders for less than 200 sq. ft.



Features:


- LCS porcelain enamel steel surface mounted on either 7/16" or 1/4" MDF core with a moisture barrier back. Standard height is 4'0"; standard lengths are 4', 6', 8', 10', 12', and 16'
- Made from enameling grade steel during a 3-coat process, the LCS markerboard surface writes smoothly and erases cleanly
- Use with screw-on trim shown on page 51, for custom framing or for OEM applications

For chalkboard panels specify color and use price shown.

Number	Core
LCS-315-M	1/4" MDF core
LCS-217-M	7/16" MDF core

MLC Melamine Markerboard Panel

Cutting and packing charges will apply.



Features:

- Melamine provides a smooth, white, non-magnetic writing surface
- Panel is 1/4" thick
- For use with LCS markers

Number	Core
1032	1/4" Panel

LCS EZ Fit Panels: 1/2" Face Trim



Features:

- EZ Fit panels are designed to fit over existing boards
- Panels are White LCS porcelain enamel steel on Medium Density Fiberboard (MDF) core with a moisture barrier back
- Holes are pre-drilled 2" on center; 1" self-tapping screws included
- Satin anodize aluminum trim

Number	Size (HxW)	Weight
EZL244	4' x 4'	44 lbs.
EZL246	4' x 6'	66 lbs.
EZL248	4' x 8'	88 lbs.
EZL2410	4' x 10'	110 lbs.
EZL2412	4' x 12'	132 lbs.
EZL2416	4' x 16'	176 lbs.

H-Bar




Features:

- Use colored aluminum H-bars for joining 2 or more panels
- H-bar has a 1" face and a 1/2" opening
- Available in lengths up to 12'

Name

H-Bar

66 Extruded Aluminum Joint



Features:

- Designed to fit over H-bar, 66 Joint is 1" wide
- Finished to match writing surface, it covers existing joint and overlaps face sheet
- Furnished with double-sided tape for easy installation
- Available in lengths up to 12'

Name

66

Adhesive



Features:

15 Adhesive

- Used for installing unmounted tackboard panels
- Available in 1-gallon cans; coverage varies from 80 to 100 sq. ft.

16 Adhesive

- Used for installing framed markerboards, chalkboards, and tackboards as well as unframed panels
- Available in 28 oz. tubes and 5-gallon cans; 1 gallon covers approx. 160 sq. ft. area of factory framed boards or 80 sq. ft. area of materials.

17 Adhesive

- Used for installing fabric only (936 Hook-Fab, 3106 Designer Fabric, and 1499 Fabricork vinyl fabric)
- Available in 1-gallon cans; coverage varies from 80 to 100 sq. ft.

Note: Not intended for use when installing fabric as a wall covering.

18 Adhesive


- Water-based adhesive designed for the installation of wall panels over clean, dry, and sound wall surfaces finished to a Level 4 or Level 5
- One gallon covers approx. 100 sq. ft.

F-38 Adhesive

- VOC compliant in all 50 states; GREENGUARD Children and Schools certified
- Ultra-low VOC, non-flammable, high performance construction adhesive
- Available in 28-oz. tubes; 1 tube covers approx. 35 sq. ft. of factory framed boards

Number	Description	Weight
15A	1 gallon	10 lbs.
16AT	28 oz. tube	2.75 lbs.
16A-5G	5 gallon	50 lbs.
17	1 gallon	10 lbs.
18	1 gallon	10 lbs.
F-38	28oz. tube	2.75 lbs.

Roller and Trowel

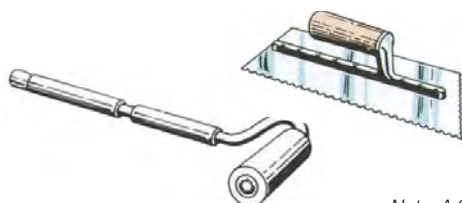

Features:

Serrated Steel Trowel

- Ideal for spreading markerboard or chalkboard adhesive – is made of masonry trowel steel with a serrated edge with 1/8" notches

Pressure Roller

- Lightweight rubber roller designed for installing replacement skins on existing board surfaces.

Number	Description	Weight
65	Serrated Steel Trowel	5 lbs.
64	Pressure Roller	4 lbs.

Note: A 2-handed roller similar to one used for laying floor tile or linoleum is required for installing vertical wall panels or large runs of markerboard skins.

Tan Nucork

Tan Nucork is a premium grade, fine grain natural tan composition cork. Nucork is dimensionally stable and has uniform density and particle size.



Note: Unmounted cork is shipped oversize for cutting to exact size on job.

Features:

- An economical tackboard surface, Tan Nucork is pure grain natural cork without burlap backing
- Nucork has a smooth, resilient surface ideal for use with pins or thumbtacks
- 150 FR Nucork has a Class B fire rating based on ASTM E84 tunnel test as follows: flame spread – 65; smoke developed – 70. Meets military specification MIL-C-15116, Type II
- Available unmounted - by the piece or in full rolls, and mounted on either duracore or hardboard
- Standard height is 4'; mounted nucork available in lengths up to 16', except 380A which is 12' maximum
- Full rolls are approximately 90' long. (Lengths of rolls vary. Billing based on actual square footage shipped.)

Cutting Charge:

- For cutting mounted Nucork to non-standard sizes – vertical and/or horizontal – add \$.80 per lin. ft.

Packing Charge:

- A \$50 packing charge will be added to orders for less than 200 sq. ft. of mounted Nucork.

Number	Description	Thickness	Backing	Weight
150	Full Rolls only	1/4"	None	1/4 lb.
150A	Under 200 sq. ft.	1/4"	None	1/4 lb.
150B	Over 200 sq. ft.	1/4"	None	1/4 lb.
150FR	Full Rolls only	1/4"	None	1/4 lb.
150FRA	Under 200 sq. ft.	1/4"	None	1/4 lb.
150FRB	Over 200 sq. ft.	1/4"	None	1/4 lb.
380A		1/16"	Duracore	3/4 lb.
550		1/4"	Hardboard	1/2 lb.

Hook-Fab

Hook-Fab is a hook-and-loop compatible non-woven fabric made from 100% nylon with polyester foam core and nylon tricot backing. Easily cut to size, Hook-Fab can be used with hook-and-loop fasteners, tacks or push pins. The low maintenance, stain resistant surface makes Hook-Fab ideal for any environment.



No. 930 Hook-Fab on cork underlay

No. 934 Hook-Fab on cork underlay on 1/4" hardboard

976 Black

Hooktape

Features:

- Hook-Fab can be used with hooktape as well as thumbtacks and pushpins.
- Offered in laminated panel form, fabric with cork underlay, or as fabric only
- Hook-Fab is renowned for its resistance to soil and staining and will not fade
- Lightweight and pliable, yet durable enough to stand up to heavy use, Hook-Fab combines good looks with superior performance

Standard Sizes:

- Hook-Fab panels (except 936 which is 55" wide) are priced on the basis of 4' height and 1' increments in length. No. 930 may be shipped oversize for cutting to actual size on job

Cutting Charge:

- For cutting mounted Hook-Fab to non-standard sizes – vertical and/or horizontal – add \$.80 per lin. ft.

Packing Charge:

- A \$50 packing charge will be added to orders for less than 200 sq. ft. of mounted Hook-Fab.

Note: Cutting Charge and Packing Charge do not apply to No. 936. No hanging devices are included with edge-wrapped material.

Number	Description	Max Length	Weight/sq. ft.
930	Fabric on cork underlay		
930A	Cut to Size – Less than 200 sq. ft.	16'	1/2 lb.
930B	Cut to Size – 200 sq. ft. or more	16'	1/2 lb.
934	Fabric on cork underlay on hardboard	16'	1-1/2 lbs.
934EW	934 with edges wrapped	16'	1-1/2 lbs.
935	Fabric on fire retardant Duracore	12'	1 lb.
935EW	935 with edges wrapped	12'	1 lb.
936	Hook-Fab fabric only – 55" wide	120'	1/16 lb.
937	Fabric on Duracore	12'	1 lb.
937EW	Fabric on Duracore with Edges Wrapped	12'	1 lb.
923	Self gripping Hooktape, pre-glued, pressure-sensitive back, available in 1" x 7' long rolls		

Unmounted materials up to 120 lbs. and mounted panels up to 4' x 4' can ship FedEx Ground. Freight Class 70.


Claridge Cork

Claridge cork is made from renewable raw materials. The combination of oxidized linseed oil, resin, cork and pigments in the product gives Claridge Cork flexibility and resilience. Claridge Cork has a smooth, uniformly dense, suede-like surface with exceptional durability.

1/4" Unmounted Cork



1/4" Mounted Cork



- | | | | |
|-----------------|----------------|-----------------|----------------|
| 1100 Tan | 1117 Salsa | 1106 Tan | 1137 Salsa |
| 1103 Oyster | 1118 Tangerine | 1123 Oyster | 1138 Tangerine |
| 1104 Cinnamon | 1119 Pineapple | 1124 Cinnamon | 1139 Pineapple |
| 1108 Mushroom | 1120 Lettuce | 1128 Mushroom | 1140 Lettuce |
| 1109 Buff | 1129 Blueberry | 1131 Buff | 1149 Blueberry |
| 1110 Fawn | 1132 Black | 1126 Fawn | 1142 Black |
| 1111 Smoke | 1136 Graphite | 1127 Smoke | 1146 Graphite |
| 1113 Steel Gray | | 1122 Steel Gray | |

Features:

- Claridge Cork is made from pure natural ingredients
- The color-impregnated surface is durable, soil resistant, and washable
- Burlap backed, Claridge Cork is dimensionally stable and will not warp or crumble
- Meets ASTM E-84 and meets or exceeds MIL-C-15116-C, Type 1
- No toxins or harmful emissions

Standard Sizes:

- Claridge cork is priced on the basis of 4' height and 1' increments in length.
- All unmounted cork is shipped oversize for cutting to exact size on the job
- Mounted cork available in lengths up to 16'
- Full rolls of Claridge Cork average 95' in length. Invoicing is based on actual square footage shipped

Cutting Charge:

- For cutting mounted Claridge Cork to non-standard sizes – vertical and/or horizontal – add \$.80 per lin. ft.

Packing Charge:

- A \$50 packing charge will be added to orders for less than 200 sq. ft. of mounted Claridge Cork.

Number	Description	Cork Thickness	Backing	Weight
1199	Unmounted Cork 4' roll	1/4"	Heavy Burlap	1lb.
1199A	Under 200 sq. ft.	1/4"	Heavy Burlap	1lb.
1199B	Over 200 sq. ft.	1/4"	Heavy Burlap	1lb.
1190	Mounted Corkboard	1/4"	Burlap on Hardboard	2lbs.

Claridge Cork: Color Options



1108 Mushroom



1109 Buff



1110 Fawn



1100 Tan




1104 Cinnamon




1103 Oyster



1111 Smoke




1113 Steel Gray



1136 Graphite



1132 Black



1117 Salsa



1118 Tangerine



1119 Pineapple



1120 Lettuce



1129 Blueberry

Colors are reproduced with reasonable accuracy. If match is critical, call or write for samples.

Unmounted materials up to 120 lbs. and mounted panels up to 4' x 4' can ship FedEx Ground. Freight Class 70.

Designer Series Bulletin Board

Designer Series fabrics (Guilford® FR701 pattern) provide tack surfaces with classic appeal, ideal in any environment. Durable, easy to clean, and sustainable, Designer Series fabrics are made from 100% recycled polyester. Additional Guilford colors and fabrics optional.



Features:

- Designer Series fabrics are offered in laminated panel form, fabric with cork underlay, or as fabric only
- Colorfast, soil and stain resistant
- Fabric meets ASTM-E 84 Flame Tunnel Test Class "A" Rating
- Standard Sizes: All mounted Designer Series fabric panels (except 3106) will be priced on the basis of 4' heights and 1' increments in length. 3106 is 66" wide; cut to size pieces will be billed on the basis of 5' heights and 1' increments in length. Full rolls vary in length from 165' to 180'. Billing is based on actual square footage shipped.

Note: 3100 may be shipped oversize for cutting to exact size on job.

Cutting Charge:

- For cutting to non-standard sizes – vertical and/or horizontal – (except 3106) add \$.80 per lin. ft.

Packing Charge:

- A \$50 packing charge will be added to orders for less than 200 sq. ft. of Designer Fabric (except 3100 and 3106).

Options:


- C.O.M. fabrics approved for vertical surfaces in lieu of Designer Fabric – call for pricing

Number	Description	Max Length	Weight/sq. ft.
3100	Fabric on cork underlay		
3100A	Cut to Size – Less than 200 sq. ft.	16'	1/2 lb.
3100B	Cut to Size – 200 sq. ft. or more	16'	1/2 lb.
3101	Fabric on underlay on Duracore-1/2" overall	12'	1-1/8 lbs.
3101EW	Fabric on underlay on Duracore w/edges wrapped	12'	1-1/8 lbs.
3102	Fabric on cork underlay on 1/4" hardboard – 1/2" overall	16'	1-1/2 lbs.
3102EW	Fabric on cork underlay on 1/4" hardboard with edges wrapped – 1/2" overall	16'	1-1/2 lbs.
3103	Fabric on duracore (not fire retardant)	12'	1 lb.
3103EW	Fabric on duracore (not fire retardant) with edges wrapped	12'	1 lb.
3104	Fabric on 7/16" fire retardant Duracore	12'	1 lb.
3104EW	Fabric on 7/16" fire retardant Duracore with edges wrapped	12'	1 lb.
3106	Full Rolls – Designer Fabric only	Approximately 165'	1/8 lb.
3106A	Cut to Size – Designer Fabric only	165'	1/8 lb.


Designer Series Fabrics: Color Options




1684 Noir




1686 Dark Pearl



1689 Wedgewood



1690 Gray Mix



1691 Quartz



1692 Wheat



1694 Blue Topaz



1687 Moleskin



1683 Silver




1697 Mulberry

Colors are reproduced with reasonable accuracy. If match is critical, call or write for samples.

Unmounted materials up to 120 lbs. and mounted panels up to 4' x 4' can ship FedEx Ground. Freight Class 70.

Fabricork

Fabricork, in 4 distinct patterns – Viewpoint, Esquire, Linden, and Belair, is available in a wide range of colors. Superior in style and performance, Fabricork is long-lasting and easy to clean. Fabricork vinyl fabric (Koroseal®) is a product of RJF International.

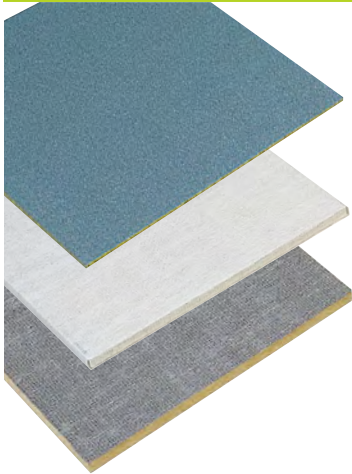

* Fire retardant Duracore backer board has a Class A Fire Rating per ASTM E84 as follows – Flame Spread 25, Smoke Developed 20

Features:

- Fabricork has a washable, stain resistant surface
- Vinyl coated fabric retains new appearance – wears indefinitely
- Vinyl fabric meets or exceeds Federal Specifications CCC-W-408A
- Available as fabric only, fabric mounted on cork underlay, and as mounted Fabricork tackboard panels

Standard Sizes:

- Fabricork panels are priced on the basis of 4' height and 1' increments in length.

Cutting Charge:

- For cutting to non-standard sizes – vertical and/or horizontal – add \$.80 per lin. ft.

Packing Charge:

- A \$50 packing charge will be added to orders for less than 200 sq. ft. of Fabricork panels (except 1500).

Options:


- Fabric covered H-Bar joints for joining 2 unframed panels. If required, specify and ADD \$6.20 per lin. ft. (12' maximum length)
- C.O.M. vinyls approved for vertical surfaces can be used. See C.O.M. and special fabric note in Terms and Conditions.

Number	Description	Thickness	Max Length	Weight/sq. ft.
1380	Fabric on cork underlay on Duracore	1/2"	12'	1lb.
1380EW	1380 with edges wrapped	1/2"	12'	1lb.
1381FR	Fabric on flame retardant Duracore*	1/2"	12'	1lb.
1381FREW	1381 with edges wrapped	1/2"	12'	1lb.
1500 (Full Rolls)	Fabric on cork underlay	1/4"	80'	1/2 lb.
1500A	Fabric on cork underlay. Under 200 sq.ft.	1/4"	80'	1/2 lb.
1500B	Fabric on cork underlay. Over 200 sq.ft.	1/4"	80'	1/2 lb.
1499	Fabric only, no underlay	90'	90'	1/8 lb.
1550	Fabric on cork underlay on Hardboard	1/2"	16'	1-1/2 lbs.
1550EW	1550 with edges wrapped	1/2"	16'	1-1/2 lbs.

Fabricork: Color Options



KV216 Ecrú



KV230 Oyster



KV233 Driftwood




KV237 Curry




KV241 Wheat Straw




KL404 Dorset




KL412 Ancestral



KL483 Downing Stone




KL490 Rectory




KL498 Winthrope



KE510 Runway




KE522 Innocent



KE584 Power



KE591 Counselor




KE592 Gentleman Gray




KB278 Pacific




KB290 Sterling



KB661 Dawn



KB662 Gray



KB664 Antique


Colors are reproduced with reasonable accuracy. If match is critical, call or write for samples.

Unmounted materials up to 120 lbs. and mounted panels up to 4' x 4' can ship FedEx Ground. Freight Class 70.


Frame Finishes

Frames available in aluminum or wood. Aluminum frames in satin anodize or Medium or Dark Bronze color anodize, powder coat in 302P Black and 314P Bronze, standard powder coat finishes, three textured finishes and five transparent powder coat finishes. Wood frames are available in a variety of finishes.


Wood Finishes

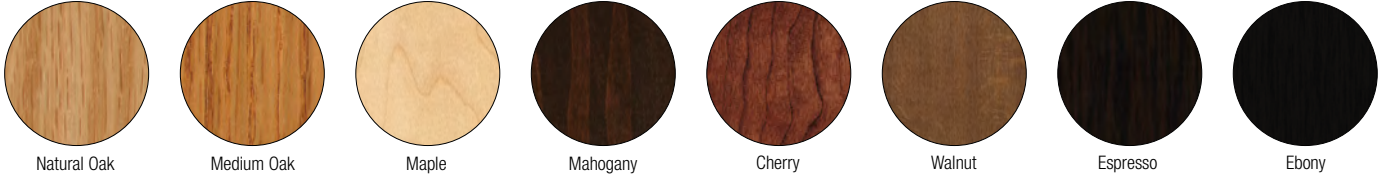

Aluminum Finishes

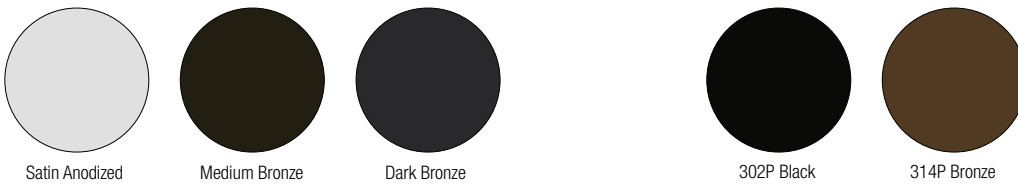


Powder Coat Finishes for Aluminum

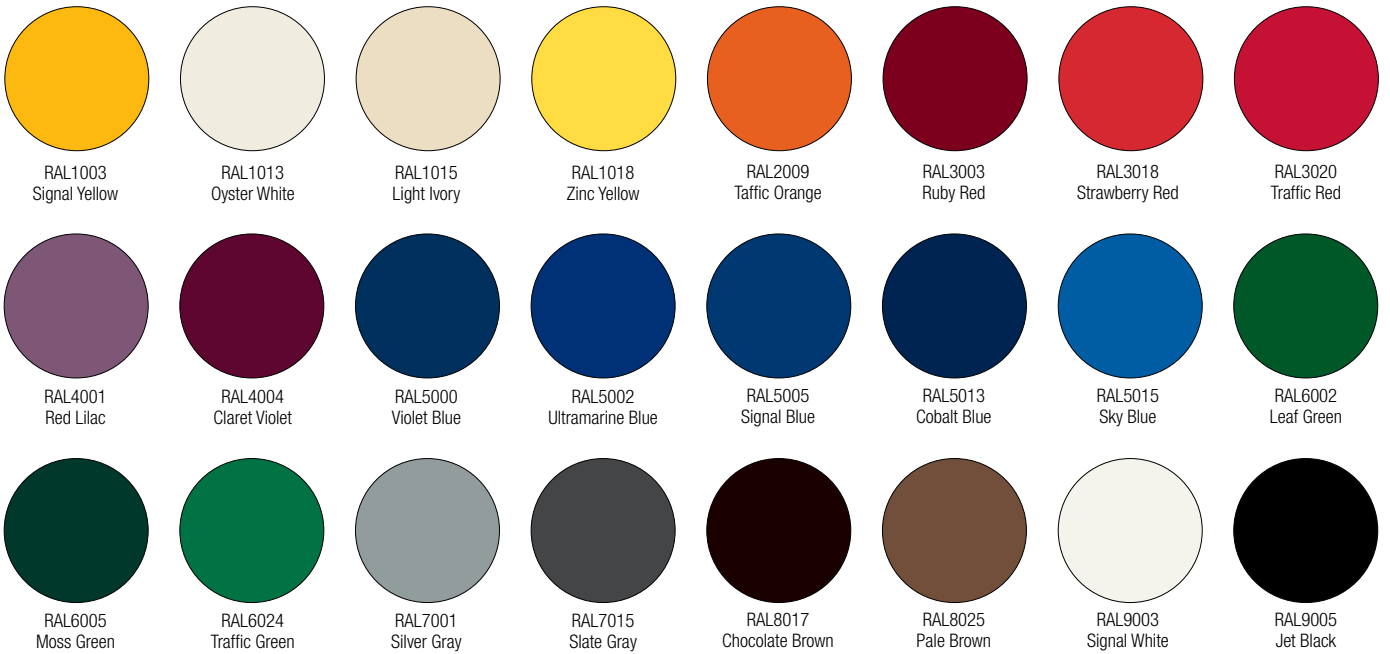

Optional Textured Finishes



Optional Transparent Finishes

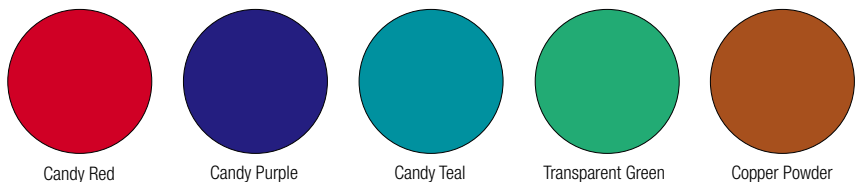

Colors are reproduced with reasonable accuracy. If match is critical, call or write for samples.

terms and conditions

DISCLAIMER – The Terms & Conditions below expressly set forth Claridge Products and Equipment, Inc.'s position and are not intended to be a full, comprehensive, and complete detail of each subject. Claridge reserves the right to alter, change, modify, expand, or discontinue any of the policies set forth below. Claridge further reserves the right to alter, change, modify, or discontinue its programs, policies, or relationship with any customer who violates Claridge's stated Terms & Conditions.

SPECIFICATION CHANGES

Claridge reserves the right to institute changes to material, parts, or design as well as to discontinue models, options, and/or parts without any prior notice. Price subject to change without notice.

ORDERS

All orders must be submitted in writing by US Mail, Fax, or E-mail. It is the Buyer's sole responsibility to check orders and their corresponding acknowledgments for accuracy. Minimum order of \$25.

ACKNOWLEDGMENTS & LEAD TIMES

Upon credit approval, orders will be manufactured and invoiced based upon the information on the acknowledgment. It is the Buyer's responsibility to notify Claridge of any acknowledgment discrepancies. Actual shipment dates may differ from acknowledged dates due to lack of credit approval. If an order is subject to a credit hold, it will be scheduled for shipment only after it is released from credit hold.

CPR (CLARIDGE PRIORITY RESPONSE)

Claridge offers three levels of CPR: (1) CPR Urgent – a guarantee that the order will ship within one week once Buyer agrees to CPR terms; (2) CPR Express – a guarantee that the order will ship within two weeks once CPR terms are accepted; and (3) CPR Standard – a guarantee that the order will ship within three weeks once terms are accepted. If Buyer's order is shipped late, Claridge pays a 10% penalty for every day the order ships late – up to the total cost of the material.

CHANGE ORDERS

Claridge reserves the right to apply additional charges to the invoice for orders revised after manufacturing has begun. All changes must be in writing.

TERMS

For credit approved customers, all merchandise will be invoiced when shipped, with standard terms of net 30 Days. The Buyer agrees that Claridge shall have the right to assess interest charges of 1.5% per month on invoices not paid and received by Claridge within terms. The Buyer further agrees that Claridge has the right to change terms, suspend shipments, or refuse orders from any delinquent account.

SECURITY

The Buyer agrees that Claridge maintains a security interest in all merchandise sold by it to the Buyer until all monies have been paid to Claridge for said merchandise.

CANCELLATION

All orders are considered firm and cannot be cancelled except by consent from Claridge. Claridge reserves the right to assess a Cancellation Fee of no more than 25%, or as negotiated, for any order cancelled by the Buyer.

FREIGHT POLICY

Every effort will be made to ship in accordance with customer requested freight carriers. Claridge is not responsible for damage in shipment when product is shipped on a third party or collect basis. In the event of visible freight damage, note damage on the freight bill and notify the carrier at once for inspection. Note that carriers require reports of damage within 5 days. Failure to report visible damage or loss is the consignee's responsibility. Concealed damage identified after 5 days from receipt is the sole responsibility of the consignee.

SHIP DATES & DELAYS

If Claridge cannot ship products as scheduled due to causes beyond their reasonable control (force majeure), the ship date will be extended to compensate for the delay as determined by Claridge.

REDELIVERY OF FREIGHT

Two weeks notice is required when redelivery of merchandise will be required, or the actual cost for freight, restocking and rehandling, and storage, if applicable, will be billed to the customer.

RETURNS

Many Claridge products are made-to-order and may not be returned. Claridge reserves the right to refuse return of custom-made or specialty merchandise. All approved returns must be prepaid by the Buyer and are subject to a restocking charge of no greater than 25%. Merchandise must be returned unused, and properly packaged in original shipping carton.

WARRANTY

Claridge porcelain enamel steel markerboard and chalkboard writing surfaces are guaranteed for the Life of the Building. Other product in Catalog carries a one year guarantee against defects in materials and workmanship.

CUSTOM PRODUCTS

Modifications to standard products are available. Contact the factory – or the Claridge location nearest you for quotations.

MATERIAL DISCLAIMER

Slight color variations may occur on surface materials. Claridge cannot be held responsible for reasonable variances.

C.O.M. & SPECIAL FABRICS DISCLAIMER

Claridge cannot be held responsible for special fabrics that, in our opinion, would create unsatisfactory results for the intended application using normal manufacturing methods. Sampling may be required. All inquiries and correspondence should be directed to: Claridge Products and Equipment, Inc.

P. O. Box 910, Harrison, AR 72602-0910
Phone: 870-743-2200 Toll Free: 800-434-4610
Fax: 870-743-1908
E-mail: claridge@claridgeproducts.com